






DEWALT®

NAIL REFERENCE GUIDE

	DEWALT MODEL	NAIL LENGTH RANGE	NAIL DIAMETER RANGE	NAIL ANGLE	MAJOR BRANDS OF NAILS
	D51238K 18 GA 2" BRAD NAILER	5/8" to 2"	18 GA	N/A	Senco, Porter Cable, Fasco, Grip Rite, National, ISM, Unicatch, Prebena, Interchange, Falcon, Paslode, Hitachi, Bostitch, others
	D51256K 16 GA FINISH NAILER	1-1/4" to 2-1/2"	16 GA	N/A	Paslode, Porter Cable, Fasco, Grip Rite, National, ISM, Unicatch, Prebena, Interchange, Falcon, Hitachi, Bostitch, others
	D51275K 15 GA ANGLED FINISH NAILER	1-1/4" to 2-1/2"	15 GA	34°	Senco, Porter Cable, Fasco, Grip Rite, National, ISM, Unicatch, Falcon, Interchange, others
	D51822 CLIPPED HEAD FRAMING NAILER	2" to 3-1/2"	.113" to .131"	30° - 34°	Paslode, Senco, Fasco, Halsteel, Grip Rite, National, ISM, Keystone, Interchange, others
	D51844 FULL ROUND HEAD FRAMING NAILER	2" to 3-1/2"	.113" to .148"	20° - 22°	Hitachi, Fasco, Halsteel, ISM, Tree Island, Grip Rite, National, Keystone, Golden State, Interchange, others

AVAILABLE ACCESSORIES:

FINISH

- D512751 15 GA O-Ring Repair Kit
- D512752 15 GA Piston/Driver Assem.
- D512753 15 GA Bumper Kit
- D512561 16 GA O-Ring Repair Kit
- D512562 16 GA Piston/Driver Assem.
- D512563 16 GA Bumper Kit
- D512381 18 GA O-Ring Kit
- D512382 18 GA Piston/Driver Assem.
- D512383 18 GA Bumper Kit

FRAMING

- D518005 Framing Nailer O-Ring Kit
- D518006 Framing Nailer Bumper Kit
- D518004 Framing Nailer Pusher Spring Assem.
- D518232 Clipped Head Piston/Driver Assem.
- D518452 Full Round Piston Driver Assem.


MISC

- D510005 Finish/Framing Trigger Valve Kit
- D512005 15 GA/16 GA No Mar Pad
- D510022 Finish/Framing Sequential Action Trigger Kit
- D510020 Finish/Framing Bump Action Trigger Kit
- D500100 DEWALT Pneumatic Oil, 8 oz.
- D500105 DEWALT Pneumatic Oil, 20 oz.
- D510023 Framing Sequential Trigger Kit

FOR SERVICE or QUESTIONS, call 1-800-4 **DEWALT** or visit www.DEWALT.com

TYPICAL NAILS ACCEPTED by the D51823 and D51845 FRAMING NAILERS:


ROOF DECKING, SHEATHING and SUBFLOORING

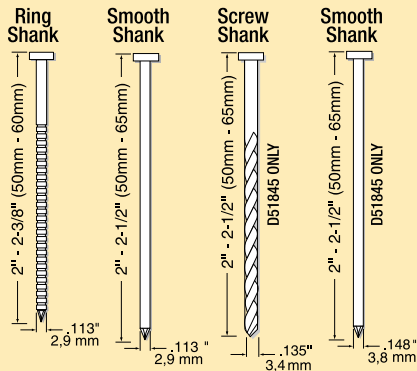

NAIL HEAD TYPES:

- Full Round - D51845, 20° - 22° Collation
- Clipped Head- D51823, 31° - 34° Collation

FRAMING, DECK BUILDING and STRUCTURAL

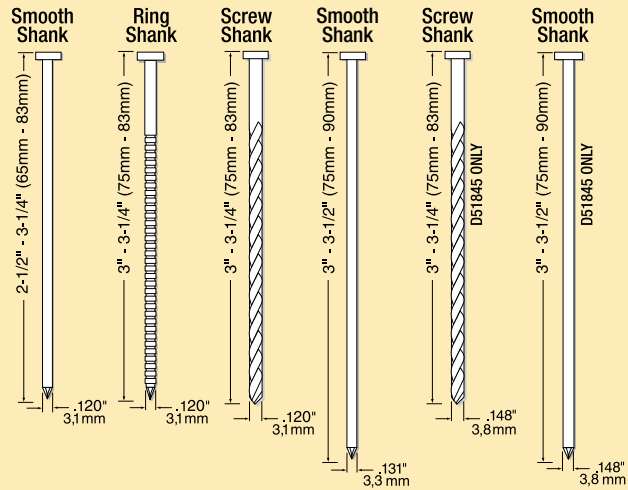

NAILER/COMPRESSOR MATRIX:



OF NAILERS

1
2
3
4
5

- Light Gray: Sufficient to support tools at all nailing rates
- Dark Gray: Sufficient for moderate nailing rates
- Black: Sufficient for only slow to moderate nailing rates

NAILER WARRANTY:

1 YEAR WARRANTY*

*EXCLUDING O-RING AND DRIVER BLADES

COMPRESSOR WARRANTY:

1 YEAR WARRANTY*

*2 YEAR WARRANTY ON ALL HONDA MOTORS

NAILER/COMPRESSOR SETUP:



- Recommended operating pressure - 110 psi
- Use Teflon Pipe Tape on threaded connection to prevent leaks

