

Proper procedure for resetting the overload

D55153

If the motor overheats for any reason,
the overload protector will shut off the motor.

The motor must be allowed to cool down
before restarting

To restart....

Ensure the ON/OFF switch is in the OFF position



Allow the motor to cool

Tips:


- Improve ambient conditions
- Improve ambient ventilation/aeration
- Move compressor on a shaded area
- Eliminate extension cord

An improper extension cord could cause motor shut-off.

In an extension cord must be used, be sure it is:

- a 3 wire extension cord that has 3-blade grounding plug and a 3-slot receptacle that will accept the plug on the product.
- In good conditions.
- No longer than 50 feet (15,2 m)
- 12 gauge (AWG) or larger. (Wire size increases as gauge number decreases. 10 AWG and 8 AWG may also be used. DO NOT USE 14 OR 16 AWG).

Depress the reset button on the motor

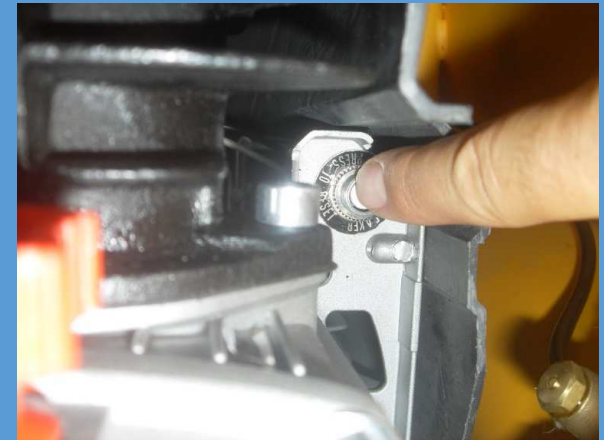

You can now run compressor again!